



**MANUFACTURING QUALITY LAWN CARE EQUIPMENT SINCE 1945**

## ***Owner's Manual***

***Accessories Mount  
2646***

***Extension Kit  
2900***

***Mount Kit Traxter  
7119***



***IMPORTANT  
Read and follow all  
Safety Precautions  
and Instructions  
Before Operating this  
Equipment.***



## ***ATV ACCESSORIES***

***Sold as Separate Pieces!!!!***



***ASSEMBLY  
OPERATION  
SERVICE AND ADJUSTMENT  
REPAIR PARTS***

***Made In The  
USA***

***1602 CORPORATE DRIVE PO BOX 67 WARRENSBURG, MISSOURI 64093  
PH 660. 747. 8183 FAX 660. 747. 8650  
[swisherinc.com](http://swisherinc.com)***

## LIMITED WARRANTY

The manufacturer's warranty to the original consumer purchaser is: This product is free from defects in materials and workmanship for a period of one (1) year from the date of purchase by the original consumer purchaser. We will repair or replace, at our discretion, parts found to be defective due to materials or workmanship. This warranty is subject to the following limitations and exclusions:

- |                   |  |
|-------------------|--|
| 1) Commercial Use | The warranty period for any product used for commercial or rental is limited to ninety (90) days from the date of original purchase.   |
| 2) Limitations    | This warranty applies only to products which have been properly assembled, adjusted, and operated in accordance with the instructions contained within this manual. This warranty does not apply to any product of Swisher Mower and Machine Co., Inc., that has been subject to alteration, misuse, abuse, improper assembly or installation, or shipping damage. |
| 3) Exclusions     | Excluded from this warranty are normal wear, normal adjustments, and normal maintenance.   |

In the event you have a claim under this warranty, you must return the product to an authorized service dealer. All transportation charges, damage, or loss incurred during transportation of parts submitted for replacement or repair under this warranty shall be borne by the purchaser. Should you have any questions concerning this warranty, please contact us toll-free at 1-800-222-8183. The model number, serial number, date of purchase, and the name of the authorized Swisher dealer from whom you purchased the mower will be needed before any warranty claim can be processed.

THIS WARRANTY DOES NOT APPLY TO ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES AND ANY IMPLIED WARRANTIES ARE LIMITED TO THE SAME TIME PERIODS STATED HEREIN FOR ALL EXPRESSED WARRANTIES. Some states do not allow the limitation of consequential damages or limitations on how long an implied warranty may last, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights and you may have other rights, which vary from state-to-state. This is a limited warranty as defined by the Magnuson-Moss Act of 1975.

## SAFETY PRECAUTIONS & DECALS



This Safety Alert Symbol indicates important messages in this manual. When you see this symbol, carefully read the message that follows and be alert to the possibility of personal injury.

**Read this manual completely. Failure to observe the following safety instructions could result in serious injury or death.**


- Read the manual. Learn to operate this machine safely.
- Keep the operating speed **LOW!!!!** Do not operate over 5 MPH (8KMH).
- Allow only responsible adults who are familiar with these instructions to operate this machine. Never allow children to operate this machine.
- Be sure the area is clear of other people before operating. Children are often attracted to the machine and the operating activity. **Never assume that children will remain where you last saw them.** Keep children under the watchful care of another responsible adult.
- Watch for traffic when operating near or crossing roadways.
- Do not operate the attachment if it has been dropped or damaged in any manner. Repair as necessary.
- Stop and inspect the equipment if you strike an object. Repair if necessary, before restarting.
- Dress properly. Do not operate when bare foot or wearing open sandals.
- Do not operate the machine while under the influence of alcohol or drugs.
- Never tamper with safety devices. Check their proper operation regularly.
- Operate attachments up and down slopes. There is a significant risk of overturns when operating across slopes.
- **Never make adjustments or repairs with the ATV engine running.**



**OD45 Warning Decal**



**OD55 Danger Decal**

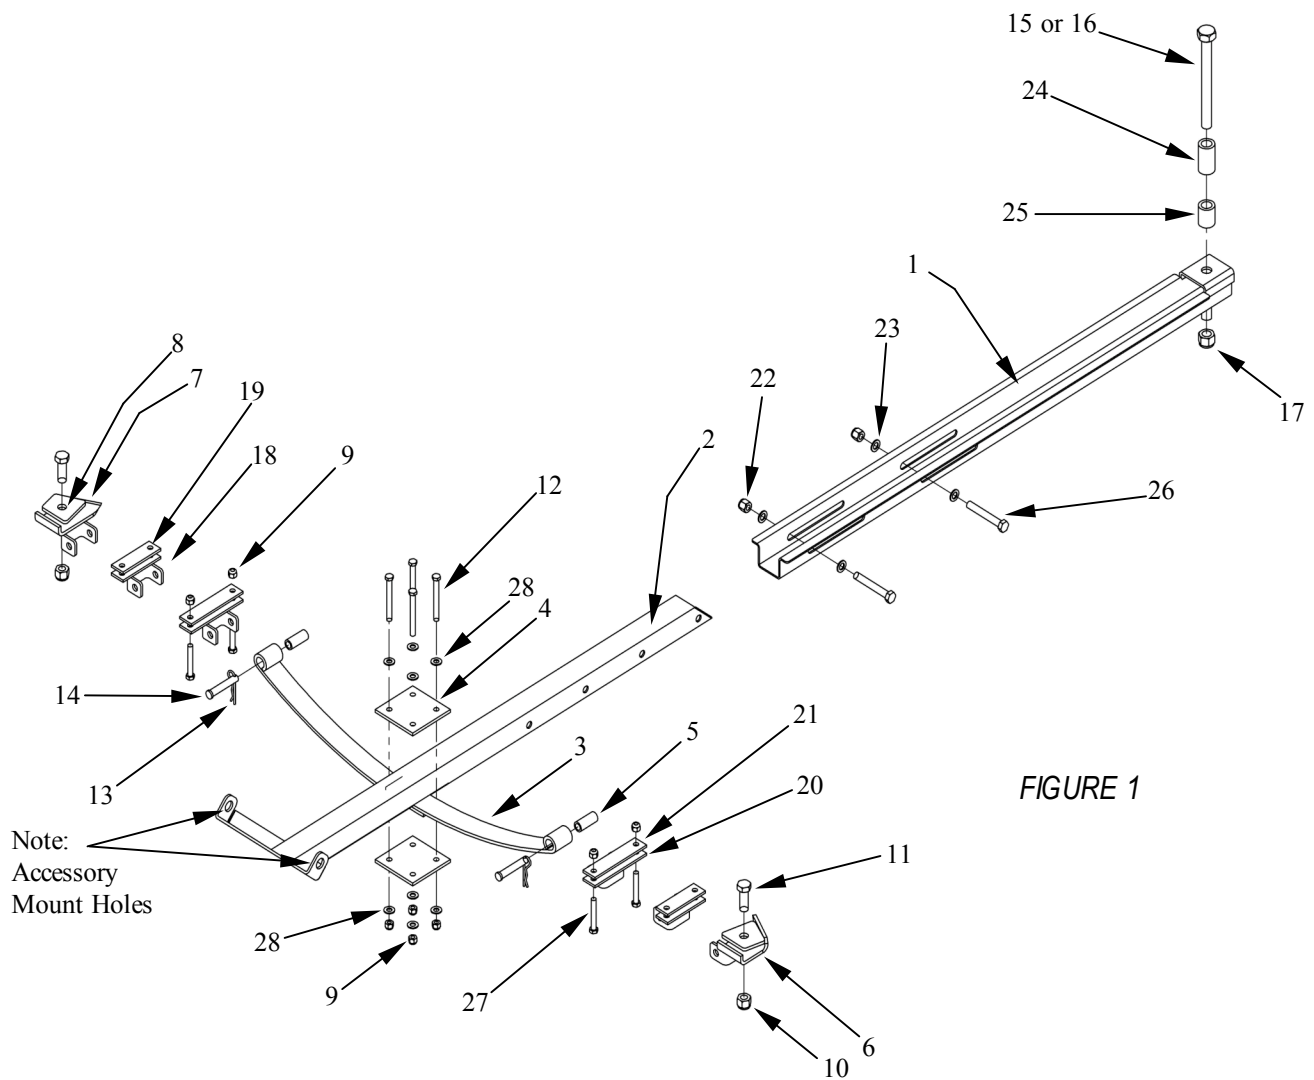

ITEM NO.	QTY.	PART NO.	DESCRIPTION	ITEM NO.	QTY	PART NO.	DESCRIPTION
1	1	2630TK	Channel Mount	15	1	NB-655	3/4 - 10 X 7 1/2 GR 5 Bolt
2	1	2593TK	Slide Bar	16	1	NB243	3/4 - 10 X 5 GR 5 Bolt
3	2	2596TK	Leaf Spring	17	1	NB-609	3/4 - 10 Nyloc Nut
4	2	2631TK	Spring Shackle	18	2	2633TK	Mount Bracket Short
5	2	2596-1	Nylon Bushing	19	2	2635TK	Bracket Plate Short
6	1	2638TK	ATV Bracket Left	20	2	2632TK	Mount Bracket Long
7	1	2637TK	ATV Bracket Right	21	2	2634TK	Bracket Plate Long
8	2	2641TK	Backing Bracket R&L	22	2	NB-281	1/2 - 13 Nyloc Nut
9	8	NB-182	3/8 - 16 Nyloc Nut	23	4	NB-177	1/2 NR Mach Bushing
10	2	NB-561	5/8 - 11 Nyloc Nut	24	1	9609TK	Spacer 1.25 X .75 X 2.1875
11	2	NB-699	5/8 - 11 X 3 GR 5 Hex Bolt	25	1	2655TK	Spacer 1.25 X .75 X 1.5
12	4	NB-645	3/8 - 16 x 4 GR 5 Hex Head	26	2	NB-577	1/2 - 13 X 3 1/2 GR5 Bolt
13	2	NB-247	Hair Pin #10	27	4	NB-619	3/8 - 16 X 2 1/2 GR5 Bolt
14	2	NB-244	1/2 X 2 3/4 Clevis Pin	28	8	NB-272	3/8 SAE Washer


# INSTALLATION OF ACCESSORY MOUNT



***TO ENSURE PROPER INSTALLATION,  
CAREFULLY FOLLOW ALL INSTRUCTIONS  
LISTED BELOW***

## MOUNTING BRACKETS

Included with your new ATV accessories mount are three sets of mounting brackets for ATV's. Brackets 18,19 and 20,21 are two sets that will work on most ATV's. The determining factor is what type of A-arms (lower portion of the front axle) are used on your ATV. If your A-arm is narrow then use bracket set 18, 19. If your A-arm is wide then use bracket set 20,21. If you have a Polaris ATV use brackets 6, 7, and 8. **Note:** The Polaris brackets are right and left oriented. Make sure you set them up as shown in Fig. 1.

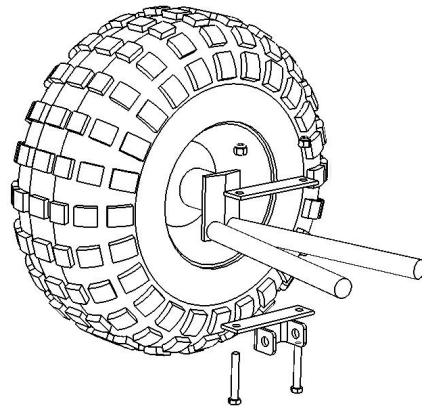


## REFER TO FIGURE 1 WHILE INSTALLING THE ACCESSORY MOUNT

1. If needed, for clearance, raise the front of the ATV. Make sure the support used is **very** stable.
2. Lay out the hardware under the ATV, as shown.
3. Mount the proper brackets to the lower A-arms of your ATV. Do not securely tighten at this time.
4. Mount leaf springs (3) to mounting brackets with clevis pin (14) and hair pin (13).
5. Attach channel mount (1) to the ATV ball hitch mount with 3/4 - 10 bolt (15 OR 16) and 3/4 - 10 nyloc nut (18). **Note:** the spacers (24 and 25) need to be installed to keep the accessories mount assembly level and for clearance.
6. Using two 1/2 - 13 bolts (26), four 1/2 bushings (23) and two 1/2 - 13 nyloc nuts (22) attach slide bar (2) to channel mount (1).
7. If previously raised, lower the ATV to the ground.
8. Place the two leaf springs (3), from step 4 and the assembly from step 6 between the spring shackles (4). Secure with four 3/8 - 16 bolts (12), eight washers (28) and four nyloc nuts (9). Securely tighten these fasteners.
9. Adjust the slide bar (2) so the accessory mounting holes are approximately two inches ahead of the front wheels. Some adjustment may be needed, after attachment is installed, to assure acceptable clearance between the attachment and the ATV.
10. Check clearance between the mounting brackets and the ATV wheel rims by turning the ATV steering to the extreme right and then the extreme left. Adjust location of the brackets if necessary. Securely tighten all fasteners.
11. Removal of the mount assembly: Raise the ATV, remove hair pins (13), pull clevis pins (14) and remove the channel mount (1) from the ATV ball hitch. Leave the mounting brackets attached to the A-Arms.

# Honda Mounting Instructions

## Installation Instructions

1. Place U-bracket over rear A-arm bar as shown.
2. Using supplied hardware, assemble plates and brackets as shown. Position the brackets so they allow wheels to turn without contacting the rims. Front bolt NB619 should be close to the front of the A-arm, contacting it if possible.

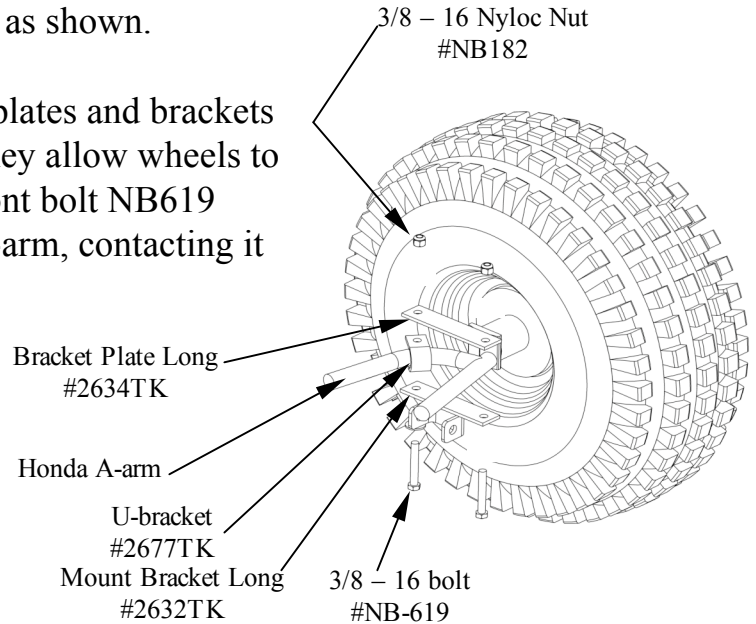


# Bombardier Mounting Instructions


## INSTALLATION INSTRUCTIONS

Kit # 7119 Required

**Same as above with addition of spacer and guard modification**

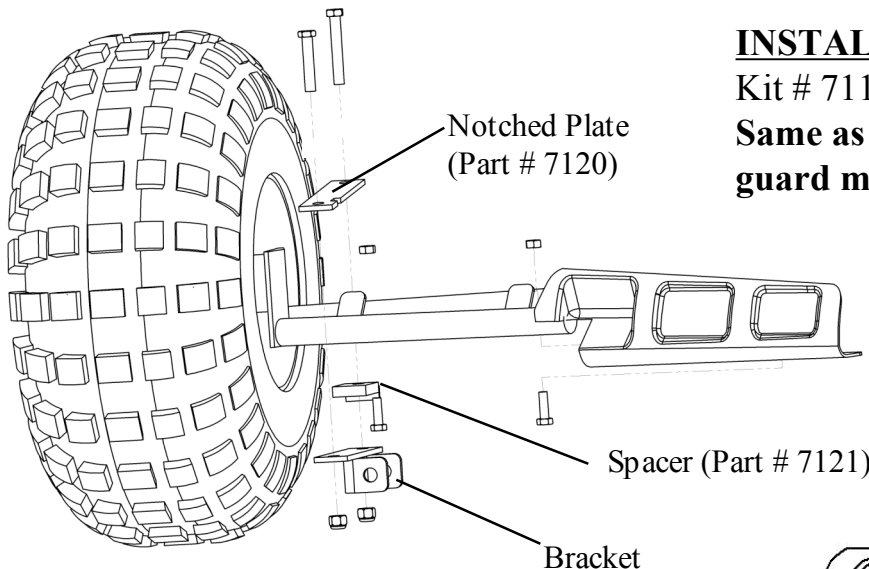


**A Arm Guard Modification**  
Guard to be modified by Owner

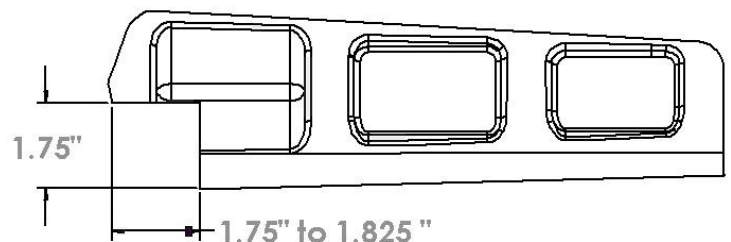

# Bombardier TraxterMax Extension Kit

## Part # 2900 (Optional)

Note:  
Extension of 21 – 33 inches at  
Six inch increments.

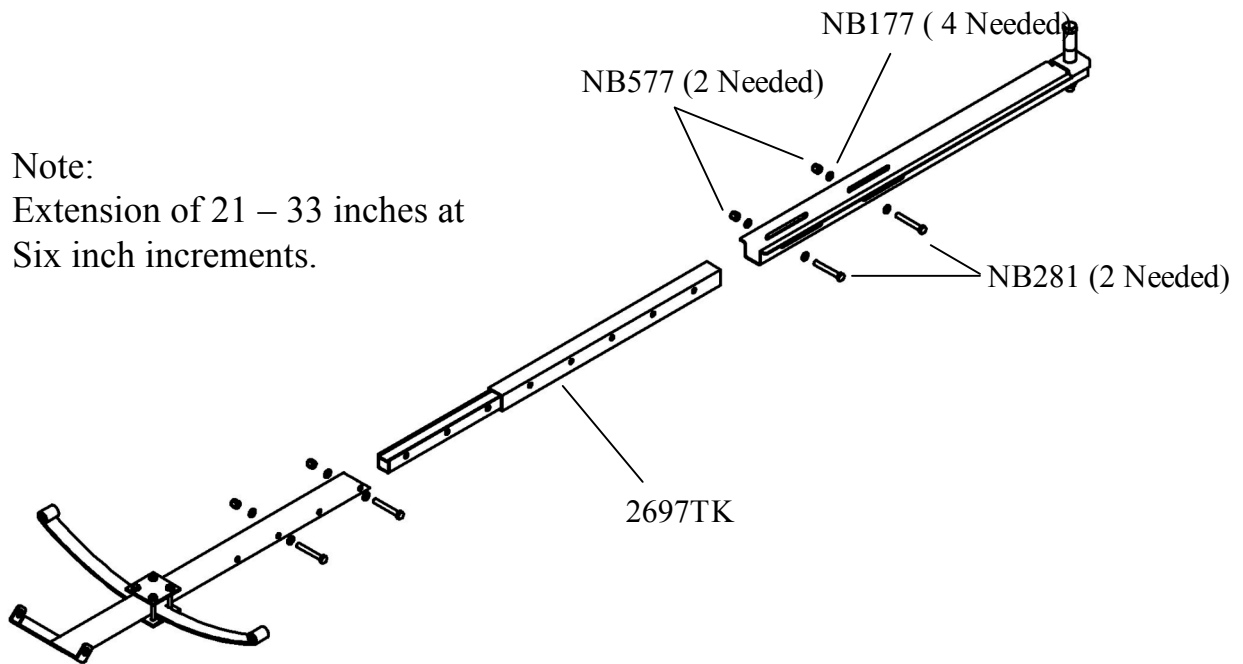

## Notes:

[illegible]



**MANUFACTURING QUALITY LAWN CARE EQUIPMENT SINCE 1945**

# ***Owner's Manual***

***Accessories Mount  
2646***



**IMPORTANT**  
**Read and follow all**  
**Safety Precautions**  
**and Instructions**  
**Before Operating this**  
**Equipment.**

## ***ATV ACCESSORIES***

**WHEN ORDERING PARTS, PLEASE HAVE THE  
FOLLOWING INFORMATION AVAILABLE:**

- \* **PRODUCT -** \_\_\_\_\_
- \* **SERIAL NUMBER -** \_\_\_\_\_
- \* **MODEL NUMBER -** \_\_\_\_\_
- TYPE -** \_\_\_\_\_
- \* **PART NUMBER WITH PAINT CODE**
- \* PART DESCRIPTION**

**TELEPHONE - 1-800-222-8183**  
**FAX - 1-660-747-8650**

**SWISHER MOWER & MACHINE CO. INC.**  
**1602 CORPORATE DRIVE**  
**P.O. BOX 67**  
**WARRENSBURG, MO 64093**

**[swisherinc.com](http://swisherinc.com)**